

We hereby certify that the test results presented here are accurate and conform to the reported grade specification

**CERTIFIED MILL TEST REPORT**  
 For additional copies call  
 800-637-3227


**CMC STEEL ALABAMA**  
 101 S 50TH STREET  
 BIRMINGHAM AL 35212-3525



**1 SERIES-BPS**®

*Marcus W. McClurey*  
 Marcus W. McClurey - CMC Steel AL  
 Quality Assurance Manager

HEAT NO.: 1087613 SECTION: FLAT 2x6 20'0" A36/52950 GRADE: ASTM A36-19/A529-14 Gr 50 ROLL DATE: 08/02/2023 MELT DATE: 07/19/2023 Cert No.: 85523363 / 087613B877	S O L D T O 7136752631 7136727559	S H I P T O 7136752631 7136727559	Delivery#: 85523363 BOL#: 75523513 CUST PO#: 85W136481 CUST P/N: DLVRY LBS / HEAT: 14688.000 LB DLVRY PCS / HEAT: 18 EA																																																																													
<table border="1"> <thead> <tr> <th>Characteristic</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>C</td> <td>0.19%</td> </tr> <tr> <td>Mn</td> <td>0.71%</td> </tr> <tr> <td>P</td> <td>0.013%</td> </tr> <tr> <td>S</td> <td>0.023%</td> </tr> <tr> <td>Si</td> <td>0.16%</td> </tr> <tr> <td>Cu</td> <td>0.35%</td> </tr> <tr> <td>Cr</td> <td>0.17%</td> </tr> <tr> <td>Ni</td> <td>0.15%</td> </tr> <tr> <td>Mo</td> <td>0.058%</td> </tr> <tr> <td>V</td> <td>0.004%</td> </tr> <tr> <td>Cb</td> <td>0.018%</td> </tr> <tr> <td>Sn</td> <td>0.015%</td> </tr> <tr> <td>B</td> <td>0.0003%</td> </tr> <tr> <td>Ti</td> <td>0.001%</td> </tr> <tr> <td>N</td> <td>0.0079%</td> </tr> <tr> <td>Carbon Eq A6</td> <td>0.39%</td> </tr> <tr> <td>Carbon Eq A529</td> <td>0.42%</td> </tr> <tr> <td>Yield Strength test 1</td> <td>54.9ksi</td> </tr> <tr> <td>Tensile Strength test 1</td> <td>78.8ksi</td> </tr> </tbody> </table>	Characteristic	Value	C	0.19%	Mn	0.71%	P	0.013%	S	0.023%	Si	0.16%	Cu	0.35%	Cr	0.17%	Ni	0.15%	Mo	0.058%	V	0.004%	Cb	0.018%	Sn	0.015%	B	0.0003%	Ti	0.001%	N	0.0079%	Carbon Eq A6	0.39%	Carbon Eq A529	0.42%	Yield Strength test 1	54.9ksi	Tensile Strength test 1	78.8ksi	<table border="1"> <thead> <tr> <th>Characteristic</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>Elongation test 1</td> <td>23%</td> </tr> <tr> <td>Elongation Gage Lgth test 1</td> <td>8IN</td> </tr> <tr> <td>Yield to tensile ratio test1</td> <td>0.70</td> </tr> <tr> <td>Yield Strength test 2</td> <td>55.2ksi</td> </tr> <tr> <td>Tensile Strength test 2</td> <td>78.4ksi</td> </tr> <tr> <td>Elongation test 2</td> <td>23%</td> </tr> <tr> <td>Elongation Gage Lgth test 2</td> <td>8IN</td> </tr> <tr> <td>Yield to tensile ratio test2</td> <td>0.72</td> </tr> </tbody> </table>	Characteristic	Value	Elongation test 1	23%	Elongation Gage Lgth test 1	8IN	Yield to tensile ratio test1	0.70	Yield Strength test 2	55.2ksi	Tensile Strength test 2	78.4ksi	Elongation test 2	23%	Elongation Gage Lgth test 2	8IN	Yield to tensile ratio test2	0.72	<table border="1"> <thead> <tr> <th>Characteristic</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td colspan="2">The Following is true of the material represented by this MTR:</td> </tr> <tr> <td colspan="2">*Material is fully killed and is Hot Rolled Steel</td> </tr> <tr> <td colspan="2">*100% melted, rolled, and manufactured in the USA</td> </tr> <tr> <td colspan="2">*EN10204:2004 3.1 compliant</td> </tr> <tr> <td colspan="2">*Contains no weld repair</td> </tr> <tr> <td colspan="2">*Contains no Mercury contamination</td> </tr> <tr> <td colspan="2">*Manufactured in accordance with the latest version of the plant quality manual</td> </tr> <tr> <td colspan="2">*Meets the "Buy America" requirements of 23 CFR 635.410, 48 CFR 881</td> </tr> <tr> <td colspan="2">*Warning: This product can expose you to chemicals which are known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov</td> </tr> </tbody> </table>	Characteristic	Value	The Following is true of the material represented by this MTR:		*Material is fully killed and is Hot Rolled Steel		*100% melted, rolled, and manufactured in the USA		*EN10204:2004 3.1 compliant		*Contains no weld repair		*Contains no Mercury contamination		*Manufactured in accordance with the latest version of the plant quality manual		*Meets the "Buy America" requirements of 23 CFR 635.410, 48 CFR 881		*Warning: This product can expose you to chemicals which are known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov	
Characteristic	Value																																																																															
C	0.19%																																																																															
Mn	0.71%																																																																															
P	0.013%																																																																															
S	0.023%																																																																															
Si	0.16%																																																																															
Cu	0.35%																																																																															
Cr	0.17%																																																																															
Ni	0.15%																																																																															
Mo	0.058%																																																																															
V	0.004%																																																																															
Cb	0.018%																																																																															
Sn	0.015%																																																																															
B	0.0003%																																																																															
Ti	0.001%																																																																															
N	0.0079%																																																																															
Carbon Eq A6	0.39%																																																																															
Carbon Eq A529	0.42%																																																																															
Yield Strength test 1	54.9ksi																																																																															
Tensile Strength test 1	78.8ksi																																																																															
Characteristic	Value																																																																															
Elongation test 1	23%																																																																															
Elongation Gage Lgth test 1	8IN																																																																															
Yield to tensile ratio test1	0.70																																																																															
Yield Strength test 2	55.2ksi																																																																															
Tensile Strength test 2	78.4ksi																																																																															
Elongation test 2	23%																																																																															
Elongation Gage Lgth test 2	8IN																																																																															
Yield to tensile ratio test2	0.72																																																																															
Characteristic	Value																																																																															
The Following is true of the material represented by this MTR:																																																																																
*Material is fully killed and is Hot Rolled Steel																																																																																
*100% melted, rolled, and manufactured in the USA																																																																																
*EN10204:2004 3.1 compliant																																																																																
*Contains no weld repair																																																																																
*Contains no Mercury contamination																																																																																
*Manufactured in accordance with the latest version of the plant quality manual																																																																																
*Meets the "Buy America" requirements of 23 CFR 635.410, 48 CFR 881																																																																																
*Warning: This product can expose you to chemicals which are known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov																																																																																

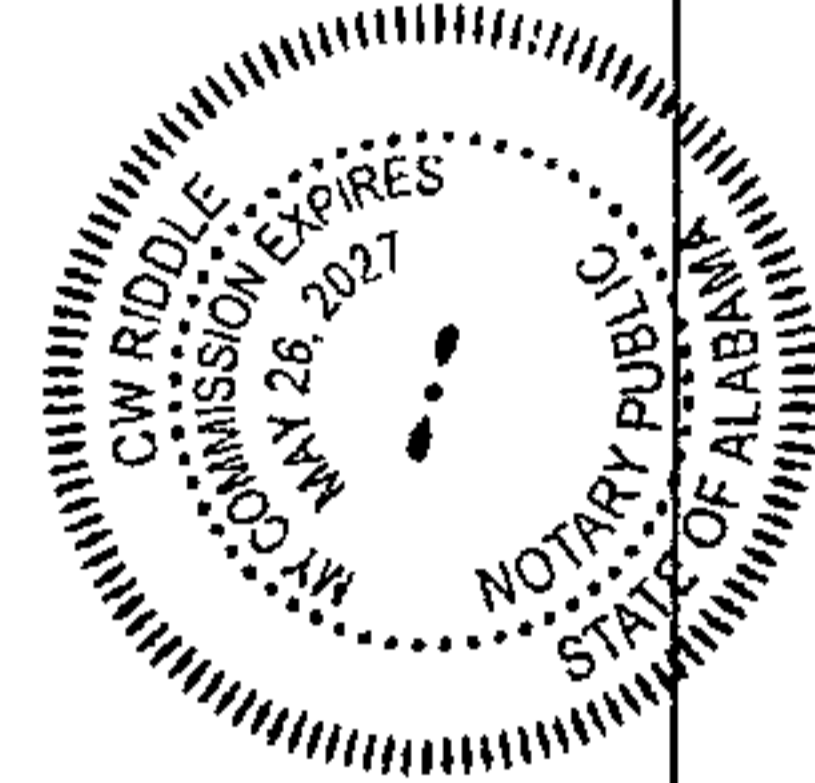

REMARKS : ALSO MEETS ASTM GRADE A36 REV 08, A572-50, A709-36, A709-50, A992, AASHTO GRADE M270-36, M270-50, CSA G40.21-04 GRADE 44W, 50W, ASME SA-36 2008A ADDEND A.